




# Condor Technology Ltd.

## DATASHEET: ELECTRICAL DIRECT HEATER - MODEL LP-(\*)A OR MODEL LP-(\*)S

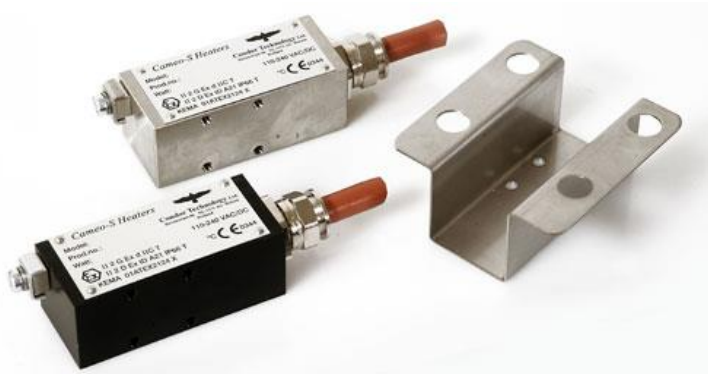

### 1 Application

Direct-heaters for Hazardous locations, designed for direct mounting onto e.g. manifolds etc.

- Freeze protection
- Anti-condensation
- Temperature maintenance

### 2 Features and Advantages

- Self-limiting heating elements
- Small dimensions
- No moving parts, no maintenance required, therefore long lifetime
- Suitable for T4 and T3 classifications
- Can be used for 110 / 240 VAC/DC

### 3 Description

All Cameo Heaters are designed around self-limiting heating elements. These self-limiting semi-conductor elements are saving power consumption. Our Cameo Direct-heaters are designed to heat the installed equipment. If properly selected for freeze protection, no thermostat will be needed.

Optional body # 5: 4 holes diam. 5,2 mm. available in Aluminium range.  
for easy mounting, at no extra charge

Alternative 316 Stainless Steel heaters can be delivered for the 100-10 Watt range.  
Also possible is an aluminium body with four holes drilled through (body # 5), for easy mounting.

Please see below for further technical data.

### 4 Range

Copyright © Condor Technology Ltd. all rights reserved.



The information contained herein is believed to be reliable. Condor Technology Ltd. assumes no responsibility or liability whatsoever for any of the information contained herein.

LP-1A	T3	ca. 115 °C Surface temperature	100-10 Watt
LP-2A	T4	ca. 105 °C Surface temperature	100-10 Watt
LP-3A	T4	ca. 90 °C Surface temperature	100-10 Watt
LP-4A	T4	ca. 70 °C Surface temperature	100-10 Watt

**High Power model:**

LP-0AHP	T3	ca. 130 °C Surface temperature	<b>200-20 Watt</b>
---------	----	--------------------------------	--------------------

\* these temperatures are measured at 20 °C ambient temperature.

**5 Technical data**

Power	:	100-10 Watt <b>or 200-20 Watt for High Power model</b>
Electrical cable	:	3 x 1 sqmm, braided std.
Material cable	:	Braided silicone (standard), non-braided optional
Standard length	:	Ca. 1 mtr. Other lengths optional
Overall dimensions	:	78 x 30 x 34 mm (LxWxH)
Weight	:	Aluminium heater ca. 350 g., 316 Stainless Steel 360 g.
Material	:	Black anodized aluminium (A) or 316 stainless steel (S)
Protection class	:	II2G Ex d IIC T4 or T3
	:	II2D Ex tD A21 IP66 T 135 °C or T 200 °C
Certification	:	KEMA 01ATEX2124X and IECEX DEK 11.0017
IP degree	:	IP 66
Voltage AC/DC	:	110/240
Ambient temp. range	:	- 60 °C ... + 90 °C
Optional body #5	:	4 holes diam. 5,2 mm. available in Aluminium range. for easy mounting, at no extra charge.

**Additional Technical data for the High Power model LP-0AHP, T3, 120 °C:**

Surface temperature	:	200-20 Watt
Overall dimensions	:	88x36x36 mm (LxWxH)
Material	:	Black anodized aluminium only
All other data	:	The same as the low power model

