


DOUBLE BLOCK & BLEED GAUGE VALVE MODEL-HM8322

ISOLATE	Blue
VENT	Red
EQUALIZE	Green



Weight=2.54 lbs(1.15 kg)



Also available in a range of other materials and options
(See **HOW TO ORDER** Data Sheet Pg.21).

Application

High integrity instrument isolation of pressure gauges and pressure transmitters.



Valve Shown with 1/2" NPT Inlet & Outlet & 1/4" NPT Vent Plug (Supplied loose)

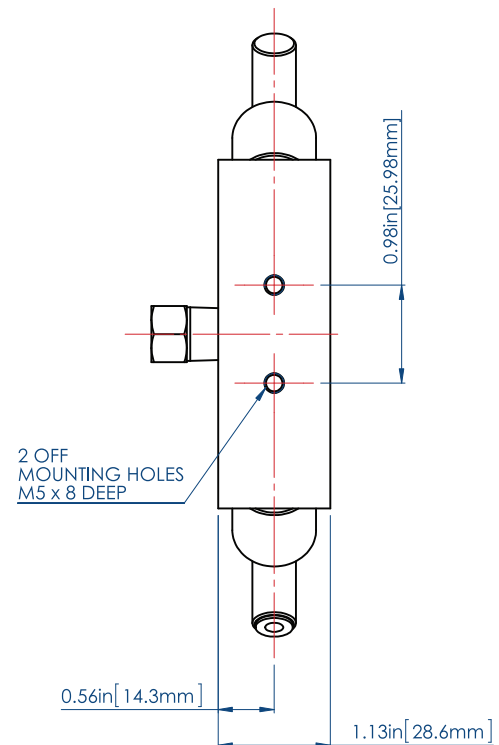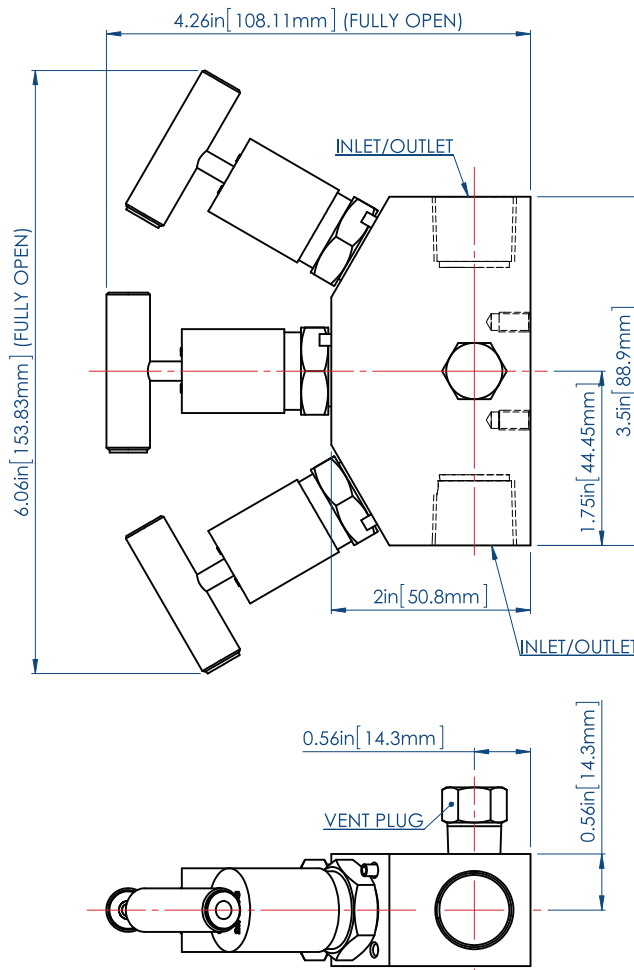

Dimensions shown in inches (millimeters) are for reference only and are subject to change.

Ordering Multiple Options

HOKE HM Valves and Manifolds are available with a wide variety of options that enable valve configurations customized to meet specific requirements. Please select or add designators from the ordering combinations as shown below:

How To Order

Standard items in bold.

Typical Ordering Part Number

HM8 3 1 2 1 1 F 8 6MO AA

of VALVES

2
3
5

TYPE

1 = Direct [AA (10,000 psi) not available]
2 = Remote - Double Block & Bleed
3 = Remote
6 = Flat Face Remote
9 = Direct Enclosure [AA (10,000 psi) not available]

FIXED

2

TIP

1 = Hard
2 = Soft

PACKING

1 = PTFE
2 = GRAFOIL® [AA (10,000 psi) not available]

ALLOY

YL = 316/316L
HC = HASTELLOY® C276
M = MONEL®
D50 = Super Duplex
TI = Titanium
TB = Titanium Blue Anodized
DX3 = Duplex
625 = 625 INCONEL®
825 = 825 INCONEL®
6MO = 6%Mo
E = Carbon Steel

SIZE

8 = 1/2"

CONNECTION

F = Female
P = Socket Weld
G = Integral GYROLOK®
Z = Integral Metric

} HM Series - Integral GYROLOK® only.
Refer to Integral catalog.

Options

AA = 10,000 psi Rated (except for direct)	AJ = Std 316 Stainless Steel Bolts Supplied Bolt Clearance 16MM	AO = Norsok M-650 Material Required
AB = Anti Tamper Vent(s)	AK = Std 6MO Bolts Supplied Bolt Clearance 16MM	AP = Panel nut on bonnets
AC = Lockable Vent(s)	AL = Extended Carbon Steel Bolts Supplied (Emerson Coplanar Flange) - Bolt Clearance 30MM	AR = Firesafe
AD = Anti Tamper Isolate	AM = Extended 316 Stainless Steel Bolts Supplied (Emerson Coplanar Flange) - Bolt Clearance 30MM	AS = Round Hand Wheel for Vent
AE = Lockable Isolate	AN = Extended 6MO Bolts Supplied (Emerson Coplanar Flange) - Bolt Clearance 30MM	AT = Round Hand Wheel for Isolate
AF = Anti Tamper Equalize		AW = Round Hand Wheel for Equalize
AG = Lockable Equalize		BC = Round Hand Wheel - Lockable Vent
AH = BSPP Connections		BE = Round Hand Wheel - Lockable Isolate
AI = Std Carbon Steel Bolts Supplied Bolt Clearance 16MM		BG = Round Hand Wheel - Lockable Equalize

Keys are not included and are sold separately. Order part number HMATHDL-316 for key.

Note: The body & trim parts on all 316/316L Valves & Manifolds comply to NACE MR-01-75 & NORSOK M-650 as standard.

Please consult the factory or your local distributor for information on special connections. O-rings, operating pressures, & temperature ratings.

△ When selecting products for specific applications users should refer to our notice at the bottom of page 1.
And the guidance of Use of Equipment on page 32.