



**UNIVERSAL MOUNTING BRACKET**

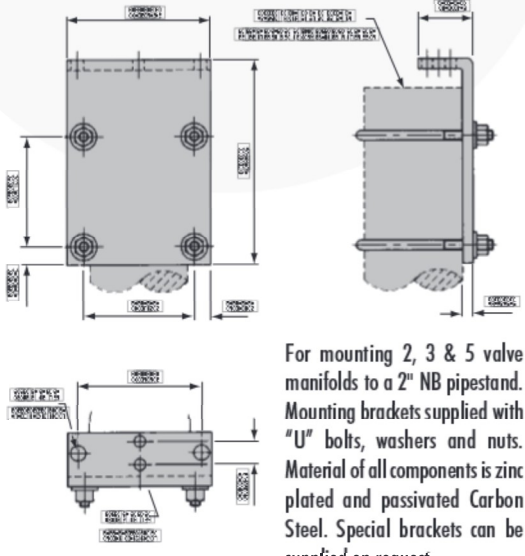


For mounting 2, 3 & 5 valve manifolds to a 2" NB pipestand. Mounting brackets supplied with "U" bolts, washers and nuts. Material of all components is zinc plated and passivated Carbon Steel. Special brackets can be supplied on request.


**Y24/Y25**



**Y34/Y35**



**Y52/Y53**



**STEAM TRACE BLOCKS**


The steam trace block is bolted to the manifold and because it is not an integral part of the manifold, stress levels (due to temperature cycling) are kept to a minimum. Steam trace blocks vary in size depending on manifold type.



**MANIFOLD HEATING, ELECTRICAL**

Specially designed 3/8" diameter cartridge manifold heater is available. The heater is inserted into the valve manifold and is protected by a brass cable gland and steel conduit designed for Zone 1 hazardous areas and approved to EExd and EExe IIc, BAS number: EX831220U. Output range either 25 or 50 watts, for 200/240 volts.

**PP TYPE**

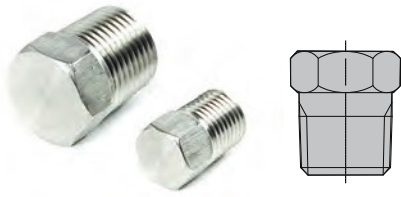

1/4" & 1/2" pressure plugs.

**CVP TYPE**



Captive vent plugs 1/4" & 1/2" NPT size.

**VP TYPE**



Vent plugs 1/4" & 1/2" NPT sizes.

**CVPT TYPE**




Captive vent plug with T bar 1/2" NPT size.

**KIDNEY FLANGES**



**FLM50S TYPE**



1/2" NPT Male threaded Kidney flange.

**FLF50S TYPE**



1/2" NPT Female threaded Kidney flange.

