


B2TE  
B2TH  
B2TL

### JACKET

Antistatic PVC or TPU jacket  
100% thickness controlled by laser measurement  
100% traceable  
Length marking for easy installation and planning  
Black as standard, other colors available

### TRACING

Electrical tracing  
Eltherm - Nvent - Bartec - Indeeco  
Freeze protection and high exposure

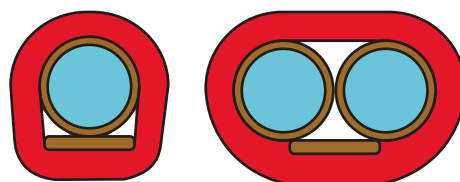

### INSULATION

Non hygroscopic fibreglass  
Controlled chlorine content  
Up to 550°C exposure

### TUBING

Tubing dimensions and pressure rating on page 9  
Available materials: 316SS, copper, PFA, PTFE, Hastelloy, duplex, 6Mo and others  
Certified conform with industry standards

