

SWITCHES AND SENSORS

Westlock control and monitoring equipment can be fitted with a variety of switches and sensors to provide the optimum combination and ideal solution for each application

Magnum XT-90 hermetically sealed proximity switch



Hermetically-sealed proximity switches with either pure tungsten or rhodium contacts for use with low power I/O's to provide longer contact life.

TECHNICAL DATA

Contact arrangement	SPDT, Form C (normally open)
Contacts	Pure tungsten Rhodium
Operating time	3.0 ms
Initial contact resistance	0.50 ohms (max.) Tungsten 0.10 ohms (max.) Rhodium
Seal	Hermetic
Housing (flame retardant)	High impact PBT
Temperature range	-45°C to +105°C (Tungsten) -40°C to +105°C (Rhodium)
Operational life	600,000 cycles (full rated load)
Entity Parameters	Ui = 30 V, Ii = 100 mA, Pi= 1 W, Ci = 10 nF, Li = 10µ
Electrical rating	
Rhodium (low power, below 1 watt)	SPDT Form C (normally open) 0.15 A/240 V AC, 1 A/24 V DC
Tungsten (high power, above 1 watt)	SPDT Form C (normally open) 3 A/120 V AC, 1.5 A/240 V AC, 2 A/24 V DC

MagPAC modular switches




Modular switches with bifurcated reed switches designed specifically for use in low power and high DI card capacitance discrete position feedback applications.

TECHNICAL DATA

Contact arrangement	Two SPST, Form A (normally open)
Contact material	Movable contact - Silver cadmium oxide Stationary contact - Molybdenum
Operating time	≤ 4 ms
Releasing time	≤ 2 ms
Initial contact resistance	≤ 250 milliohms
Seal	Hermetic
Operating temperature	-40°C to +85°C [-40°F to +185°F]
Operational life	100,000,000 operations (no load)
Repeatability	0.005 [0.125 mm]
Warranty	5 years
Electrical rating	
Rated voltage	12 - 120 V AC/V DC
Rated current	Min. 2 mA to light LED, Max. 750 mA
Allowable solenoid input voltage	25 - 120 V AC/V DC
Entity parameters	
Switch input	Vmax = 28 V DC; Imax = 174 mA; Pi = 1.6 W; Ci = 51.7 nF; Li = 0 mH

P+F NJ2-V3-N inductive proximity sensor
Intrinsically safe

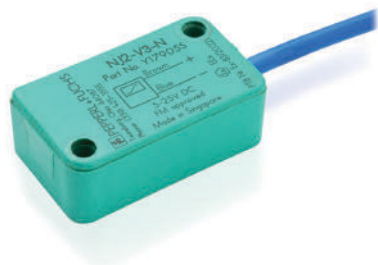

A solid state inductive proximity sensor which is available in NAMUR output. It is ideal for use in devices within potentially explosive atmospheres.

TECHNICAL DATA

Sensing range	2 mm
Electrical version	DC voltage 2 wire in accordance with EN 60947-5-6 (NAMUR)
Hysteresis	3-15% [5% typical]
Switching frequency	1 kHz
Input voltage range	5- 25 V DC
Output/current consumption	Cam trigger present ≤ 1 mA Cam trigger absent ≥ 3 mA (15 mA max)
Operating temperature	+14°F to +212°F [-10°C to +100°C]
Entity parameters	Consult manufacturer's component certificate for entity parameters

SPDT mechanical switch V3



A V3 SPDT (single pole double throw) mechanical switch (Form C) with gold plate contacts.

TECHNICAL DATA	
Operating force	150 gram max.
Release force	15 gram min.
Differential travel	0.05 - 0.25 mm
Overtravel	0.039 inch [1 mm]
Operating temperature	-20°C to +85°C
Hysteresis	3°
Entity	Ui = 30 V, li = 100 mA, Pi = 1 W,
Parameters	Ci = 10 nF, Li = 10µ
Electrical rating	
Contact	SPDT, Form C (normally open)
Arrangement	15 A/125/250 V AC 6 A/24 V DC

DPDT mechanical switch (Licon)



A Form CC DPDT (double pole double throw) mechanical switch with silver-plated contacts.

TECHNICAL DATA	
Contacts	Silver plated
Approvals	UL, CSA
Operating temperature	-55°C to +85°C
Hysteresis	20°
Electrical rating	
Contact	DPDT (Form CC)
Arrangement	10 A/125/250 V AC 10 A/24 V DC



Translations

Where translated, the copy is taken from the original English document TD10057-EN as checked by the relevant notified certification body and therefore the original English document will prevail. No rights or liability can be derived from any translation.

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All trademarks in this material are the property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype (WESTLOCK CONTROLS®) are registered trademarks of Crane Co. All rights reserved.

WESTLOCK CONTROLS

Head Office	USA	Europe	Asia
280 N. Midland Avenue, Ste 258	+1 201 794 7650	+44 [0]1892 516277	+65 6266 4535
Saddle Brook, NJ 07663			
United States	westlockcontrols.com		