


BI Type Needle Valve

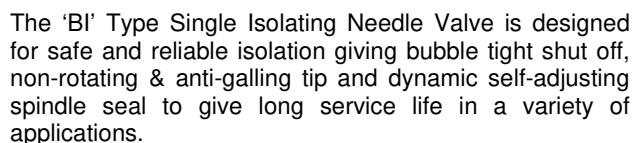

Key Features of the Oliver Needle Valve range

- Non rotating tip - self centering & anti-galling
- Piston ring - gives dynamic adjustment of gland seal in response to pressure change
- Anti-blow out spindle - a major safety feature
- Secure seal - precision machined to give leak free operation for the life of the valve. Available in either PTFE or Grafoil

Pressure: 6000psi	Packing: PTFE	Handle: T-Bar	Bore: 0.21" (5.4mm)
Temp: 240 deg C	Compression End	Seat: Metal to metal	CV: 0.46

(Typical example) →		BI	50	S	/	NF
Type						
Bilock Compression Ends						
Size						
25 - 1/4" OD	6mm - 6mm OD					
38 - 3/8" OD	10mm - 10mm OD					
50 - 1/2" OD	12mm - 12mm OD					
Material						
S - 316S31 Stainless Steel						
M - Monel (400)						
HC - Hastalloy (C276)						
(Others available)						
Options						

- | | |
|---|--------------------------------------|
| AG - Grafoil | MTG - Mounting Holes x 2 |
| AT - Anti-Tamper | NA - NACE MR-01-75 (latest revision) |
| HL - Handle Locking | NF - Nuts and Twin Ferrules included |
| HL-PI - Handle Locking + Position Indicator | OXY - Oxygen Cleaned |
| HW - Hand Wheel | PK - PEEK Soft Tip |
| LT100 - Cryogenic Head Unit (-100°C) | PM - Metal Mount |
| MT - Metering Tip | |

Oliver Valves Ltd, Parkgate Industrial Estate, Knutsford, Cheshire, WA16 8DX. United Kingdom.

T: +44 (0)1565 632636 **E:** sales@valves.co.uk **W:** www.valves.co.uk