

**Product Data Sheet**

**L Type Barstock DBB Valve Pipe to Pipe**



Machined from a barstock body, this valve features two inline ball pattern primary and secondary isolating valves and a ball vent valve.

Ball valve bore size 10mm, 14mm or 20mm

Ideal for injection, sampling and double block and bleed for an instrument.


**Key Features of the Oliver L Type Barstock DBB Valve Pipe to Pipe**

- Compact barstock double block and bleed valve
- Anti-blowout spindle
- Reduced bore valve
- Each valve traceable by unique number
- Cam inter-lock option available

**Standard Specification**

- Maximum Pressure 6000psi
- Maximum Temperature 200°C
- Soft seated ball valve

**General Arrangement Drawing**

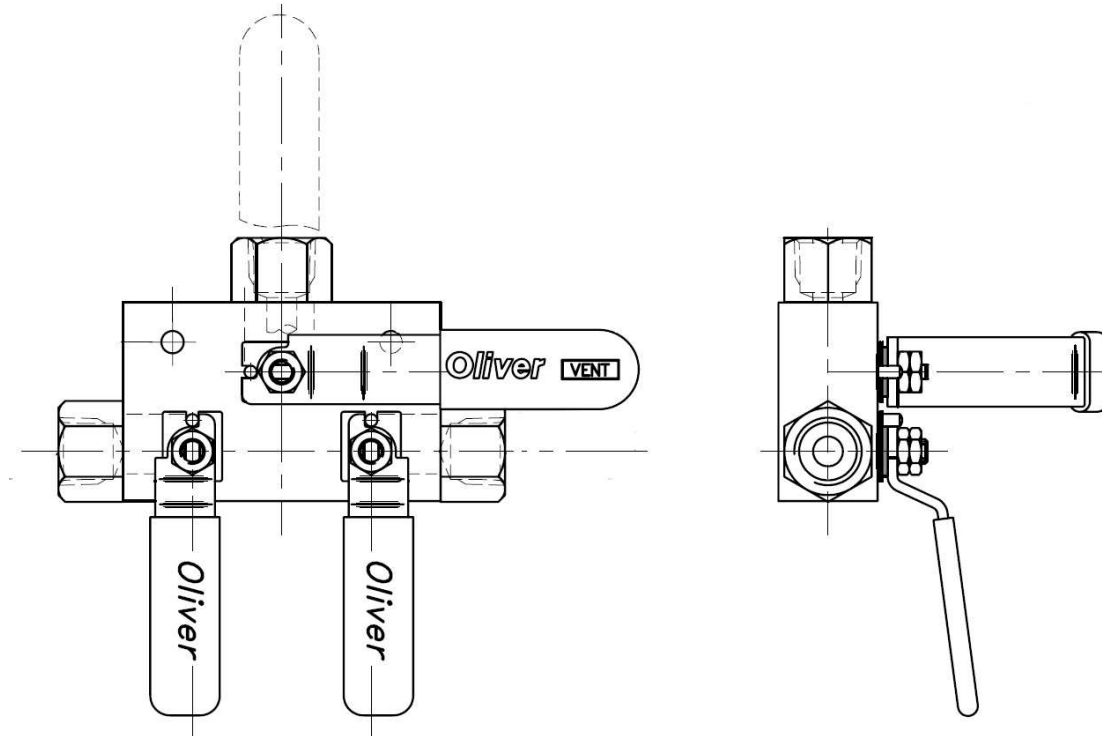

## Ordering Code

(Typical example) → Model / Type	DBB/L	/	S	/	X	/	50F/50F/50F	/	FS/HL/NA
Barstock, 3 ball in line pattern									
<b>Material</b>									
S – 316 Stainless steel BSEN 10088 1.4404 Other materials available on request									
<b>Bore</b>									
X – 10mm Y – 14mm Z – 20mm									
<b>Inlet / Instrument / Vent</b>									
<b>Connection size</b> 25 - 1/4" 38 - 3/8" 50 - 1/2" (std process/instrument & vent) 75 - 3/4" 10 - 1"									
<b>Process connection</b> (NPT standard) BP – BSP parallel pipe thread BS2779-1986 BT – BSP taper pipe thread BS21 - 1985									
<b>Connection type</b> F – Female thread (std instrument/vent) M – Male thread									
<b>Options</b>									
PK – Peek seats 2H – 2 mounting holes HL – Handle locking									
<b>Standard</b> NA – NACE MR-01-75 (latest revision) (EN1A carbon steel to NACE not available) FS – Firesafe to API 607 and BS 6755 Part 2 10mm bore – PTFE/KEL-F seats (200°C max) 14mm bore – Peek seats (240°C max) 20mm bore – Peek seats (240°C max)									

Rev 1.1