



Heaters: CT-*A

Voltage: 110-240VAC

All Models with * = 0 and 1, are T3 classified

Certified ambient temp. range: -60° C... +90° C

Power: 250-25 Watt & 500-50 Watt (marked 0)

All Models with * = 2, 3 or 4 are T4 classified

English:

Installation and maintenance instructions for Explosionproof electrical Cameo™ Heaters.

- The heaters are for fixed installations and due consideration should be given to the information on the nameplate and/or eventual “special requirements “mentioned in the certificate.**
- The apparatus may only be used on the basis of the way it protected against ignition, the gasgroup and the temperature class (**see above temp. classification/type**), for which it is certified.
- The heaters are standard equipped with a braided silicone cable. The yellow/green wire **-3-** is connected to the internal ground. The wires **-1-** and **-2-** have to be connected to the mains. The cable have to be connected to the terminals inside an ATEX certified junction box.

The nameplate indicates the standard voltages.

- If non braided cables are used, they must be protected against mechanical damages (-X-)
- After the user switches-on the apparatus, they must be protected against direct contact with the warm-surface. A WARNING STICKER has been fixed onto this surface.**

After switching-off the heater the surface slowly reduces in temperature. The user must be aware of this.

Product is according the standards:

EN 60079-0: 2006

IEC 60079-0 : 2004

EN 60079-1: 2004

IEC 60079-1 : 2007


EN 61241-0: 2006

IEC 61241-0 : 2004

EN 61241-1: 2004

IEC 61241-1 : 2004

Condor Technology Ltd.

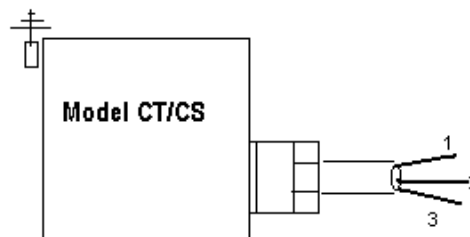

1 = bruin/brown

2 = blauw/blue

3 = geel-groen/ yellow-green

Datum: 28-02-2017

CT-*A, rev.5 ENG.

